

12V D.C. - C.C.	90050429 Puller - Aspirante	90050437 Pusher - Soffiante
--------------------	--------------------------------	--------------------------------

Static Pressure Pressione Statica	Airflow	Current	Airflow	Current
	Portata	Corrente	Portata	Corrente
mm H ₂ O	m ³ /h	A	m ³ /h	A
0,0	2550	17,3	2271	13,0
5,0	2309	18,7	2015	14,0
10,0	2022	19,8	1736	14,9
12,5	1869	20,0	1583	15,2
15,0	1716	20,3	1429	15,6
17,5	1512	20,3	1262	16,2
20,0	1307	20,4	1094	16,8
22,5	1161	21,2	941	17,4
25,0	1015	22,0	788	18,1
27,5	871	22,7	571	18,9
30,0	726	23,3	352	19,7

Test voltage 13V D.C. - Tensione di prova 13V C.C.

24V D.C. - C.C.	90050397 Puller - Aspirante	90050418 Pusher - Soffiante
--------------------	--------------------------------	--------------------------------



Static Pressure Pressione Statica	Airflow	Current	Airflow	Current
	Portata	Corrente	Portata	Corrente
in H ₂ O	m ³ /h	A	m ³ /h	A
0	2647	8,8	2529	8,1
0,2	2406	9,6	2291	8,7
0,4	2161	10,3	2050	9,1
0,5	2018	10,5	1924	9,3
0,6	1876	10,6	1798	9,4
0,7	1710	10,7	1642	9,7
0,8	1544	10,7	1487	9,9
0,9	1376	11,0	1343	10,2
1	1209	11,2	1200	10,6
1,1	1093	11,6	1076	11,0
1,2	978	12,1	953	11,4

Test voltage 26V D.C. - Tensione di prova 26V C.C.

Airflow - Portata d'aria : $1 \text{ m}^3/\text{h} = 0,59 \text{ cfm}$

Airflow - Portata d'aria : $1 \text{ m}^3/\text{h} = 0,59 \text{ cfm}$ - Static pressure - Pressione : $1 \text{ mmH}_2\text{O} = 0,04 \text{ inch H}_2\text{O} - 1 \text{ mmH}_2\text{O} = 9,81 \text{ Pa}$

Static pressure - Pressione : 1mmH₂O = 0,04inch H₂O - 1mmH₂O = 9,81 Pa

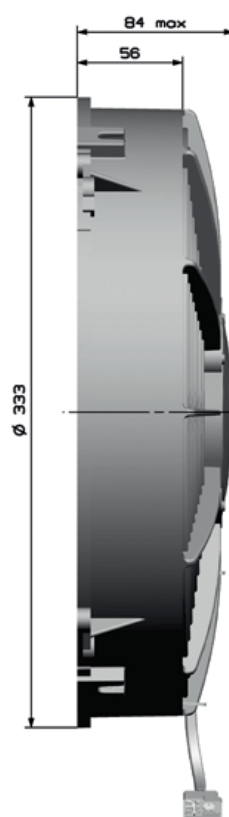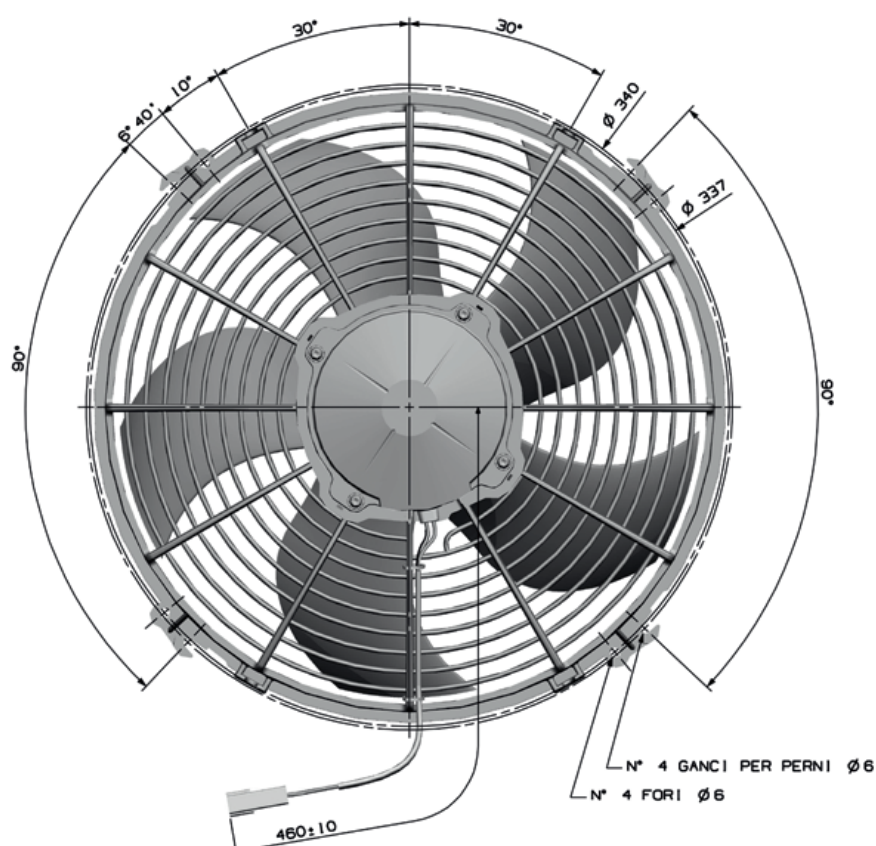

Waterproof Motor IP68

Motore stagno IP68

AMP Connector: 180908

Connettore AMP : 180908

Available with other connectors

Disponibile con altri connettori

