

12V	90050480	90050478
D.C. - C.C.	Puller - Aspirante	Pusher - Soffiante

Static Pressure Pressione Statica	Airflow Portata	Current Corrente	Airflow Portata	Current Corrente
mm H ₂ O	m ³ /h	A	m ³ /h	A
0,0	2239	12,6	2042	11,8
2,5	2065	12,8	1882	11,9
5,0	1890	13,1	1745	11,9
7,5	1707	12,9	1564	11,7
10,0	1523	12,8	1318	11,2
12,5	1161	12,0	974	11,0
15,0	792	11,2	553	10,5
17,5	553	11,4	209	11
20,0	322	11,7		

Test voltage 13V D.C. - Tensione di prova 13V C.C.


24V	90050481	90050479
D.C. - C.C.	Puller - Aspirante	Pusher - Soffiante

Static Pressure Pressione Statica	Airflow Portata	Current Corrente	Airflow Portata	Current Corrente
in H ₂ O	m ³ /h	A	m ³ /h	A
0	2324	6,5	2161	6,3
0,1	2159	6,7	2037	6,3
0,2	1995	6,8	1905	6,4
0,3	1825	6,8	1764	6,3
0,4	1656	6,8	1579	6,2
0,5	1379	6,5	1326	6,1
0,6	1095	6,1	1019	6,0
0,7	792	6,1	624	6,0
0,8	487	6,0	275	6,0

Test voltage 26V D.C. - Tensione di prova 26V C.C.

Airflow - Portata d'aria : 1 m³/h = 0,59 cfm

- Static pressure - Pressione : 1 mmH₂O = 0,04inch H₂O - 1 mmH₂O = 9,81 Pa

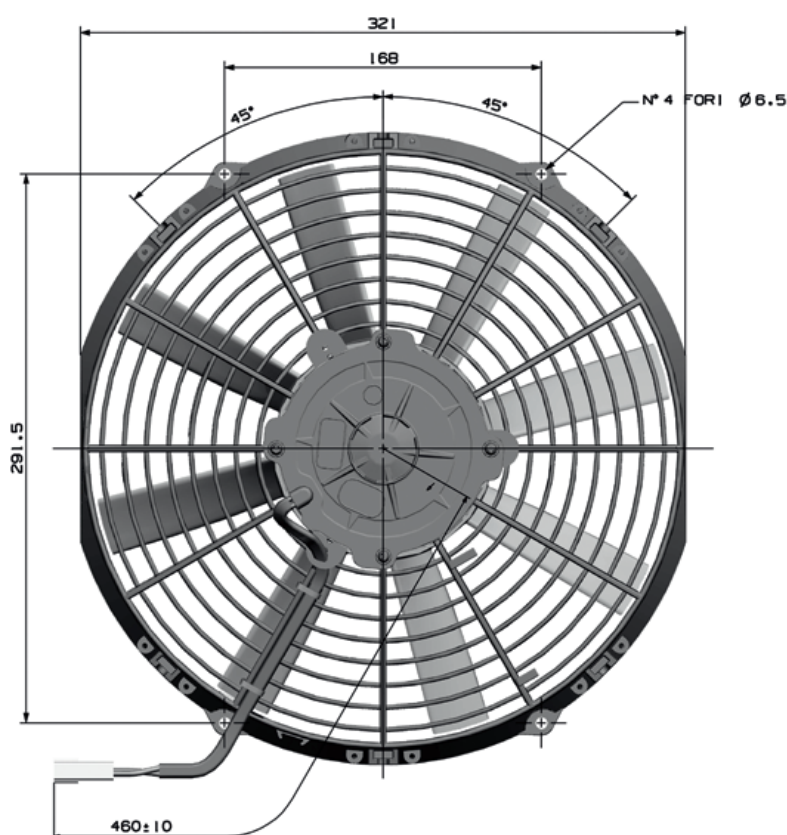

Waterproof Motor IP68

Motore stagno IP68

AMP Connector: 180908

Connettore AMP : 180908

Available with other connectors

Disponibile con altri connettori

